



DGM5447T


























5MP H.265 IR Bullet IP Camera

O FEATURES

- Starlight visibility to offer clear & color images even at night
- Equipped with a motorized lens of f2.8 ~ 12mm
- MicroSD card support (up to 128GB) for video storage
- **ONVIF** (OnvirS) standard supported to simplify system integration
- POE (Power-over-Ethernet) support to eliminate the use of power cables and reduce installation costs
- Line in / out jacks available for audio transmission
- External Alarm I/O device connection
- IR effective range up to 25 meters for night surveillance
- WDR to increase image recognizability in overexposure and dark areas
- IK10 rated, vandal-resistant case to withstand attempts to open or damage the camera
- **Remote Surveillance**
 - -- Fully compatible with Internet Explorer 6 and above on Windows operating system

O DIMENSIONS

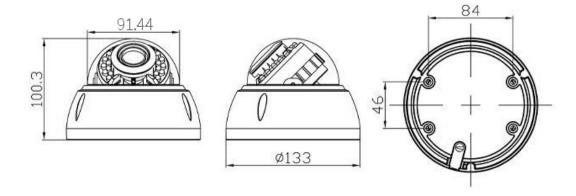





O SPECIFICATIONS

Image Sensor	1/2.8" SONY CMOS image sensor
Max. Resolution	2592 x 1944 (5MP)
Lens	Motorized f2.8 ~ 12mm / F1.6 ~ F2.2 (Auto Focus)
Viewing Angle	Wide: 105.41° (Horizontal) / 56.45° (Vertical) / 125.12° (Diagonal) Tele: 34.5° (Horizontal) / 19.5° (Vertical) / 39.5° (Diagonal)
Min Illumination	0.001 Lux / F1.6(Wide)~F2.2(Tele), 0 Lux (IR LED ON)
Shutter Speed	AES
IR LED	24 units
IR Effective Distance	Up to 25 meters
Day / Night	YES
WDR Mode	WDR (120dB) / DWDR
RTC (real-time clock)	NTP / Manual
Micro SD Card Slot	YES (up to 128GB)
Video	
Compression	H.265 / H.264 / MJPEG
Video Resolution	2592 x 1944 / 2560 x 1440 / 2048 x 1536 / 1080P / 720P / D1 / VGA / 640 x 360 / CIF
Frame Rate	25 IPS @ 2592 x 1922, 2560 x 1440 & 2048 x 1536 30 IPS @ 1920 x 1080, 1280 x 720, 640 x 480 & 320 x 240
Video Profile	High profile / Main profile / Baseline
Multiple Video Streaming	2 streams
S/N Ratio	More than 52dB (AGC off)
Bitrate Control	CBR / VBR
Image Mode	Normal / Super Starlight / Forced Frame Rate
Image Enhancement	WDR (Level 0 ~ 255) / DWDR / BLC / HLC / 2D DNR / 3D DNR
Day / Night Switch	Auto / Schedule / Manual
Forced Anti-flicker	YES
Defog	YES
White Balance	AWB
Image Orientation	Flip / Mirror
Privacy Mask	4 customized areas
Text Overlay	YES
OSD Title	Location / font size / text configurable; English & Chinese characters supported
Audio	
Line in	YES
Line out	YES
Encoding	G711 / G711A / AAC
Audio Adjustment	Input & Output
Alarm & Event	
Alarm in	YES
Alarm out	YES
Detection Mode	Human (Day & Night) / Motion
Detection Schedule	YES
Motion Detection Area	1x1, 2x2, 3x3, 3x4, 4x4, 8x8, 16x16, 22x18
Human Detection Alert	Audio alert with customized mp3 audio file(s)





• SPECIFICATIONS (CONTINUED)

On-Board Storage	Built-in memory card slot, supports microSD / SDHC / SDXC card up to 128GB
Overwrite	YES
Maximum Recoding Time / per File	2, 5, 10, 20 & 30 minutes configurable
Recording Schedule	YES
Network	
LAN Port	RJ45 connector x 1
LAN Speed	10/100 Based-T Ethernet
Supported Protocols	TCP/IP, ICMP, HTTP, DHCP, DNS, RTP, RSTP, NTP, IPv4, IPv6, HTML5, ONVIF
ONVIF Compatible	YES (Profile S)
Number of Online Users	6
Security	(1) Up to 10 user accounts with different access levels and passwords(2) IP address filtering(3) Digest authentication
Remote Access	Internet Explorer 6 and above
General	
Web Interface Language	English, Korea, Traditional Chinese, Simplified Chinese, Turkish, Italian, German, Russian & Croatian
Operating Temperature	-30℃ ~85℃
Operating Humidity	30% ~ 90%
POE	YES (IEEE 802.3af)
Power Source (±10%)	PoE (IEEE 802.3af) / DC12V
Power Consumption (±10%)	1.4W Max.
Net Weight (kg)	0.59
Certification	CE / FCC
Casing	IP67, IK10
Minimum Web Browsing Requirements	 Intel core i3 or higher, or equivalent AMD 2GB RAM AGP graphics card, Direct Draw, 32MB RAM Windows 10, Windows 8, Windows 7, DirectX 9.0 or later

^{.*}The specifications are subject to change without notice.